

bathlife®

Users Manual



808059-599-20200808

1. Installation Precautions

1. When you open the product packaging, please check the product and accessories at first. If there is any discrepancy, please contact the company or our distributor immediately.
2. The hot and cold water supply pipe of the faucet must be properly connected.
When facing the front of the faucet, the hot water supply is on the left and cold water supply is on the right. Incorrect connection will cause permanent damage to the cartridge.
3. If the accessories to be changed without affecting the use, we will not make a prior notice.
4. The impurities in the water supply pipe must be cleared before installation to avoid blockage.
5. The water pressure of the faucet is 0.05MPa-1.0MPa (including cold water and hot water pressure).
Applicable water temperature range: 4° - 90°

2. Preparation before installation

1. Please read the installation manual carefully before installation.
2. Installation work must be performed by a professional installer.
3. Installation tool:



8. Installation Instruction


- 1、Turn on the water to double-check whether there is any leakage in each connector.
- 2、Open the handle of the faucet. Normally, the wider the angle is, the larger the flow rate is and vice versa.
- 3、When open the mixer, if turn the handle to the left, there will be hotter water flow and vice versa.

9. Cleaning & Maintenance


To keep the product clean& shining, follow the steps as follows:

- 1、Flush with clean water & dry with soft cloth only;
- 2、If any dirt, clean with soft liquid or transparent glass detergent.
- 3、Do not use any scrubbing detergent, polisher, sand-cloth, paper tissue orscraper.
- 4、Do not use acid detergent, insoluble & grain-like detergent or soap.

4. Accessories list

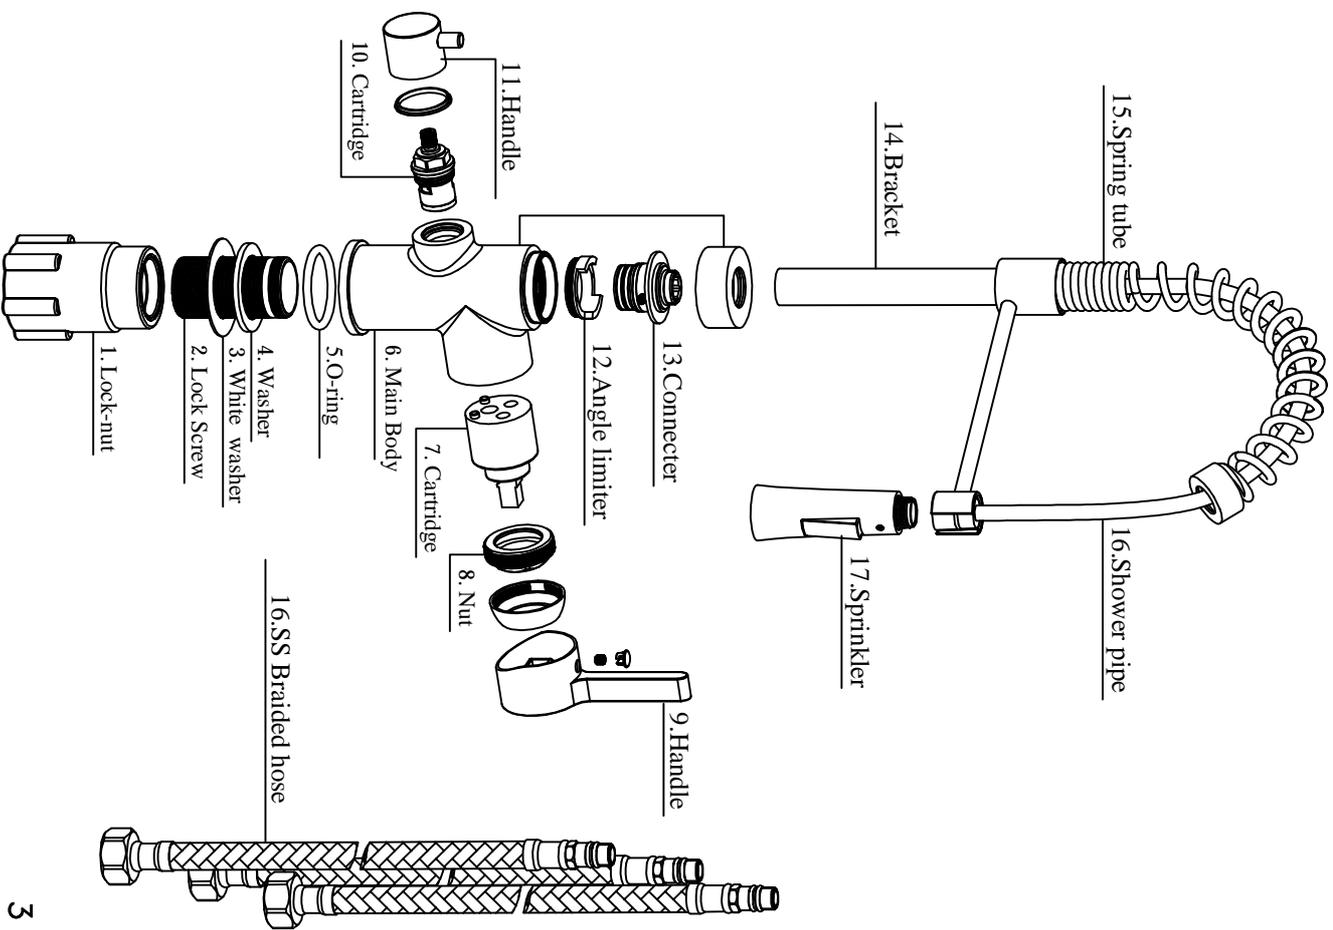


5. Installation steps

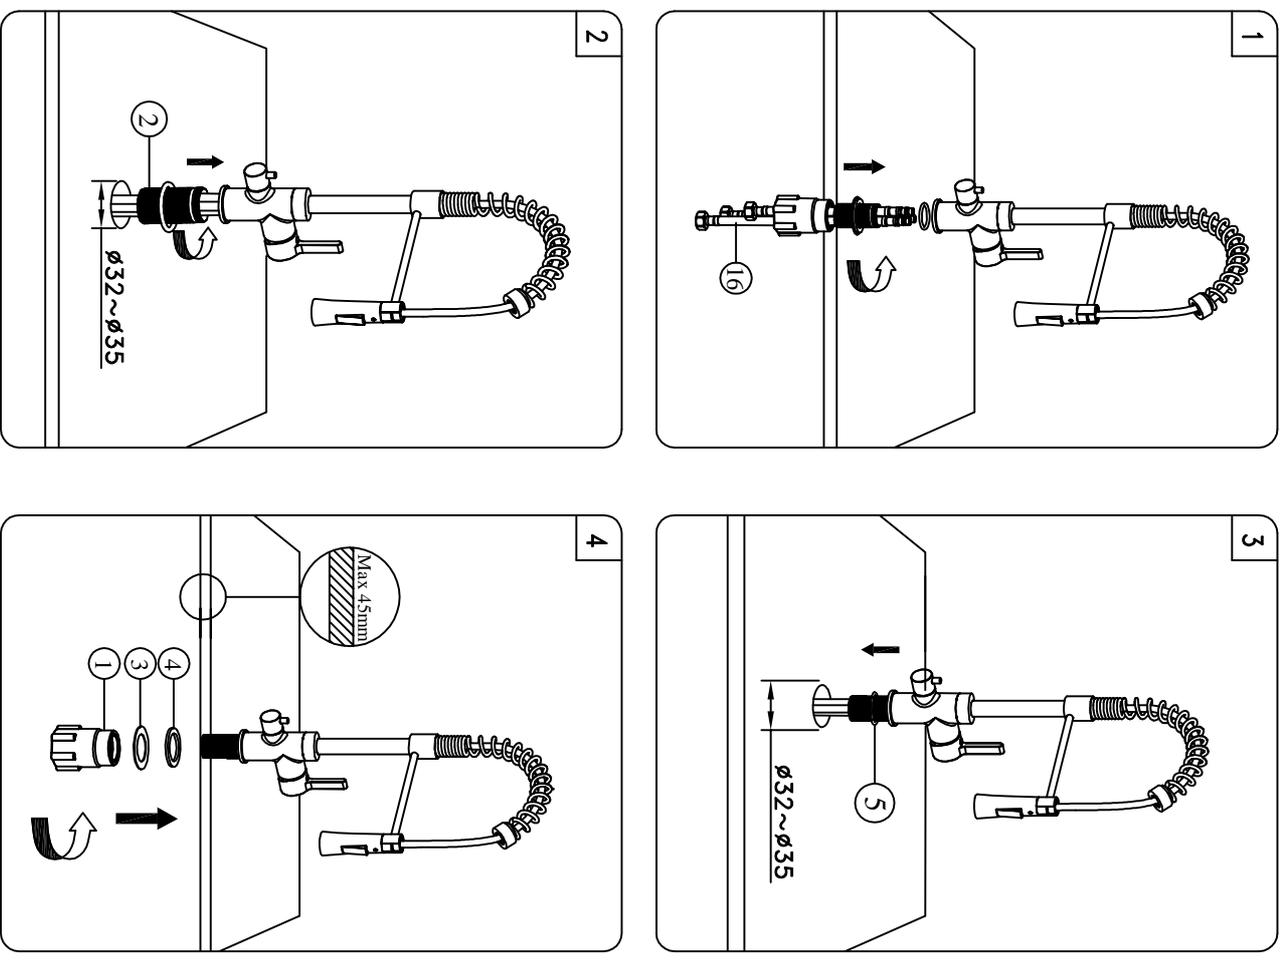


6. Rocking angle

Angle limiter offers 110° and 70° options.

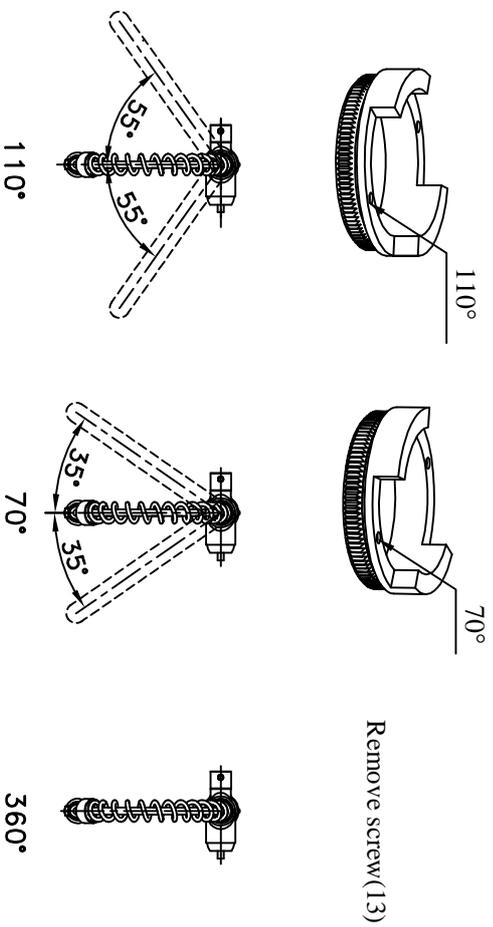

7. Angle limiter installation

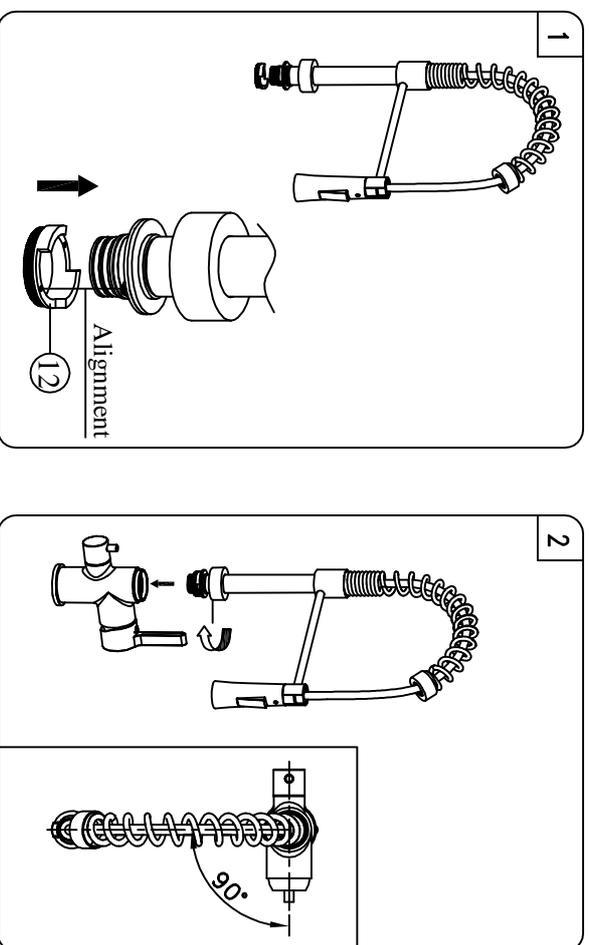

3. Technical drawing of product

