

iD Click Ultimate

LUXURY VINYL TILES

Renovating
has never
been so swift,
aesthetic
and robust

CONTENTS

TAKE UP THE ULTIMATE RENOVATION SOLUTION	3
THE NEW VINYL TILES GENERATION: A CONCENTRATE OF TECHNOLOGY	4
TOUGHEN UP YOUR FLOORS AGAINST INTENSE USE	5
OPEN UP YOUR SITES FOR IMMEDIATE USE	7
SOAK UP NOISE THROUGH THE FLOOR	9
DREAM UP SOPHISTICATED INTERIORS	11
CARING FOR PEOPLE AND THE PLANET	13
ENHANCE YOUR SPACES WITH ID CLICK ULTIMATE COLLECTION	16
TECHNICAL SPECIFICATIONS ACCESSORIES FOR AN ULTIMATE FINISH	18
TECHNICAL DATA SHEET	19



NEW!
Rigid Composite
Core Technology


TAKE UP THE ULTIMATE RENOVATION SOLUTION

Business downtime, appearance, design... You have to deliver **sterling installations in very little time**. For an ultimate experience delivering ultimate results, **Tarkett introduces its Rigid Composite Core vinyl tiles collection: iD Click Ultimate**.

This new, **innovative class of hard surface flooring** combines the strength and feel of wood

and stone with all the advantages of luxury vinyl tiles. Durable, waterproof, simple to maintain and with versatile designs worthy of the most demanding brands and customers, iD Click Ultimate leverages **Rigid Composite Core (RCC)** innovation as well as more than 130 years of Tarkett flooring experience, and provides the very best in flooring today.

In iD Click Ultimate, the extra density RCC technology delivers full performance:

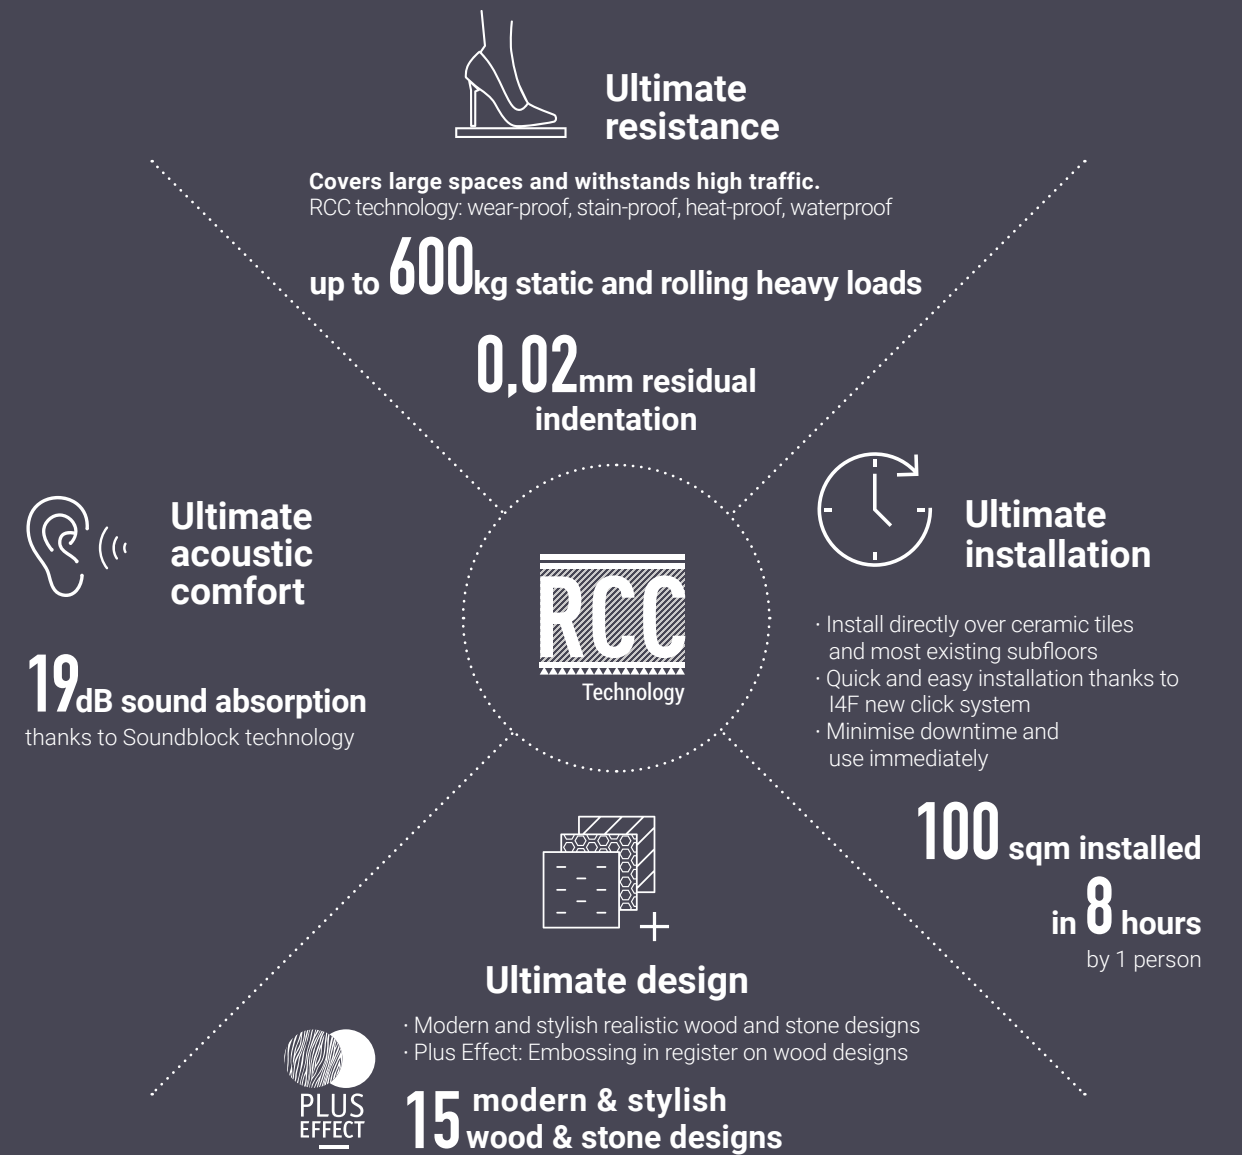

THE NEW VINYL TILES GENERATION: A CONCENTRATE OF TECHNOLOGY



1
The **Ultimate PUR** surface treatment is a photo-reticulated coating that is exceptionally resistant to abrasion and scratches.

3
Rigid Composite Core (RCC) technology provides extreme dimensional resistance and stability, ensuring reliably durable performance.

5
Installation is fast and easy thanks to new **I4F Click technology**. Simply drop, lock and click into place.

2
A **high definition** decorative layer includes lifelike embossing in register on most references.

4
The acoustic backing with **Soundblock technology** absorbs 19dB.

NEW!
Rigid Composite
Core Technology

TOUGHEN UP YOUR FLOORS AGAINST INTENSE USE

iD Click Ultimate's **extra-dense Rigid Composite Core** leads product benchmarks in terms of its **durable resistance**. It withstands all scratches, scuffs, indentations and abrasions, maintains **dimensional stability** at high heat and can be installed directly over most existing subfloors.

ULTIMATE RESISTANCE



Wear-Proof:
Top resistance to indentation, abrasion, scratches and scuffs

Meeting class 34-high traffic standards, large areas of iD Click Ultimate offer extraordinary resistance to busy activity in a professional or a light industrial environment, thanks to its **extra-dense Rigid Composite Core**.



Stain-Proof:
Resists stains, easy to clean

Ultimate PUR surface treatment protects the floor from stains and facilitates cleaning.



Traffic-Proof:
Endures high traffic and heavy loads

Install up to **400sqm** (20x20 linear meters) without any expansion joints.

Resistance to heavy loads: iD Click Ultimate can support static and rolling heavy loads (manual pallet lift and trolley) up to **600kg** installed on an even subfloor and is fit for deployment in light industrial area and supermarkets.

Resistance to indentation: In addition, this extremely resistant flooring provides an outstanding residual indentation behavior of **0,02mm** only (according to Norm EN ISO 24343-1), which secures your floor against risk of indentation marks by heavy loads.

Wear Resistance tests

	SCUFF RESISTANCE ¹ (1: worst to 10: no scuff)	ABRASION ² (in µm)	INDENTATION ³ (in mm)
Rigid Core iD Click Ultimate	8,7	44	0,02
Rigid Core Product A	7,3	51	0,09
Rigid Core Product B	7,3	52	0,06
Rigid Core Product C	4,7	79	0,05

1. Internal Tarkett scuff test (1: worst to 10: no scuff) / 2. Internal test: microscope analysis of loss of thickness after abrasion test (in µm) / 3. Indentation test (According to norm ISO 24343-1 test in mm)

ULTIMATE THERMOSTABILITY




Environment-Proof:
Withstands temperature extremes and water

Neither water, the cold nor heat can alter iD Click Ultimate's appearance. It maintains excellent dimensional stability in extreme temperature variations.

From **10°C to 60°C**,
no deformation over time

Maximum temperature of the floor allowed after installation (°C)

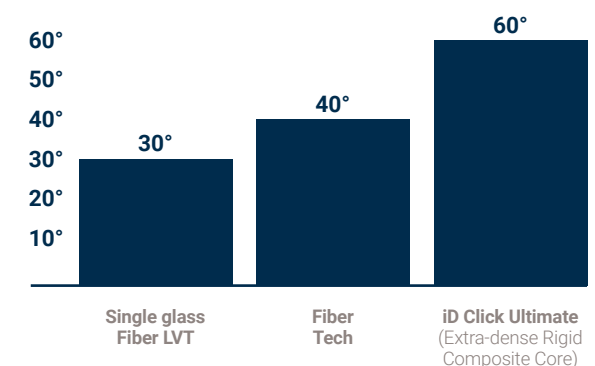



OPEN UP YOUR SITES FOR IMMEDIATE USE

iD Click Ultimate reduces business downtime to a strict minimum, since it requires no or little subfloor preparation*, no gluing and no waiting. You interfere as little as possible with a business's activities, while creating elegant spaces for them. Install and go!



Place directly over ceramic tiles and most existing subfloors

Little or no special subfloor treatment* is required before installation and subfloor imperfections are greatly minimised thanks to the flooring's conception.


Rigid Composite Core stiffness

Install on ceramics with joints up to 8mm width and 3mm depth



Foam backing

Our iD Click Ultimate tiles have a foam backing that covers subfloor imperfections. For a perfectly even floor.*

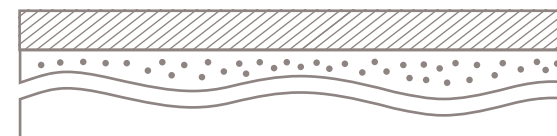

Click it quick and easy




PATENTS & TECHNOLOGIES

Tarkett is introducing the 14F Click4U locking system, which combines an angle-system for the long side of the planks and a 3L TripleLock on the short side. 3L TripleLock is a unique one piece drop-lock system that eliminates the need for additional plastic inserts making it up to 30% faster to install than traditional angle-angle click system. It also avoids squeaking while providing a high locking strength, delivering one of the easiest and fastest click systems on the market.

Up to **30%** faster than a traditional angle-angle click system

Install **100**sqm of flooring in **8** hours by 1 person



Install and walk

Everything about iD Click Ultimate makes it fast to install and ready for immediate use.

No glue, no drying time

Up to **400**sqm with no expansion joints


(Rooms of 20x20m)

SOAK UP NOISE THROUGH THE FLOOR


iD Click Ultimate's acoustic backing has Soundblock Technology integrated, creating more pleasant environments everywhere, from hotel rooms to offices.




The exclusive Ultimate structure reduces in-room walking noise by the greatest amount of any hard floor solution.

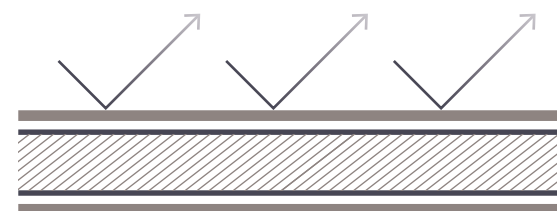

Reduce sound transmission between floors to 19dB.

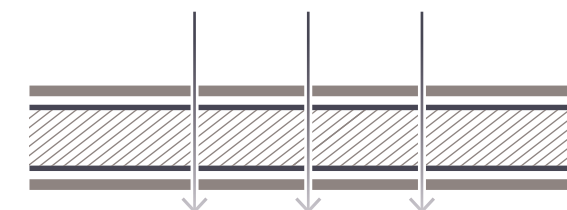

In-room walking noise (dB)

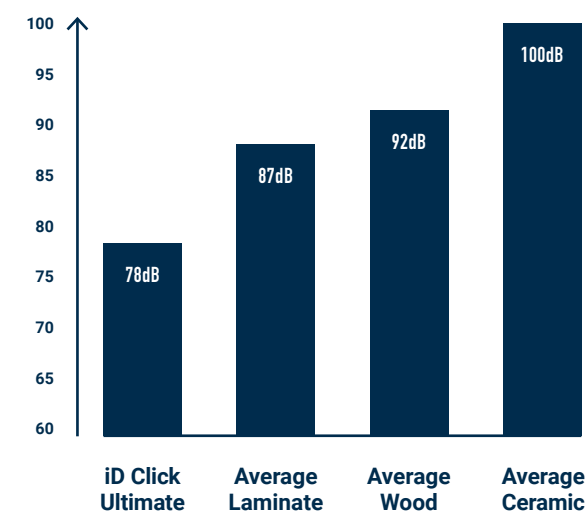

Dampen noise levels in rooms and between floors




With iD Click Ultimate integrated acoustic backing, no need for additional acoustic underlay.



DREAM UP SOPHISTICATED INTERIORS

iD Click Ultimate offers a select range of elegant wood and stone designs that will immediately add warmth and style to any space.

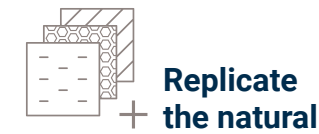

**Replicate
the natural**

A high definition printed decorative layer recreates the look and feel of wood and stone so well that it could be mistaken for the actual material.



Attention to detail

Most iD Click Ultimate designs benefit from our Plus Effect technology. Each plank receives an embossing in register (EIR) treatment to add lifelike traces and patterns that subtly catch the light.

15 modern and stylish wood
and stone designs

100% matte finish
for additional realism



**Plus Effect: Engrave patterns
onto planks with EIR to
reproduce wood's natural
essence**



**Reproduce
the tactile**

Thanks to the Rigid Composite Core, iD Click Ultimate resembles an actual hard floor covering in feel as much as in presentation.

Wood or stone feeling



CARING FOR PEOPLE AND THE PLANET

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces. Working with industry partners, we're bringing our best thinking and efforts toward making a positive impact on people and the planet.



Designing for life

We design our flooring solutions for life, thereby contributing to people's well-being and good health as well as preserving natural resources.



Closing the loop

We work toward closing the loop, as we actively participate in the development of a circular economy, in which resources are responsibly stewarded, recycled and re-used.

iD Click Ultimate has been developed to ensure:

Good indoor air quality

Through low levels of total volatile organic compounds (TVOCs) – TVOCs $\leq 100 \mu\text{g}/\text{m}^3$, compliant to EU standard EN-ISO 16000



Driving collaboration

We aim at driving collaboration with our customers, suppliers and industry partners as we believe in a collaborative approach to respond to global challenges.

Healthy spaces thanks to 100% phthalate-free product

We have been proactive in seeking alternatives to phthalates as they have been the subject of scientific debate about their potential impact on human health. Since 2010, we have developed the use of a phthalate-free plasticizer technology for our vinyl floors which is approved for food containers and toys for young children.



Quiet environment

19dB sound absorption thanks to Soundblock technology

We are committed to Doing Good, Together.



TIMELESS CONCRETE
GREY
24776022

ENHANCE YOUR SPACES WITH ID CLICK ULTIMATE COLLECTION



1. Stylish Oak

A classic and elegant oak with a natural colour play which will show some linear structures when installed. This Oak is a perfect companion to go with bold and rich colours.



Stylish Oak Beige
24775002
Matching skirting: 26643002



Stylish Oak White
24775003
Matching skirting: 26643003



Stylish Oak Grey
24775001
Matching skirting: 26643001



Stylish Oak Natural
24775000
Matching skirting: 26643000



2. Light Oak

Calm but rustic thanks to the colour play inside the planks. The exciting gradient from light to dark shades is designed to match different materials inside your ambience. This is a good fit everywhere.



Light Oak Light Grey
24775013
Matching skirting: 26643013



Light Oak Brown
24775012
Matching skirting: 26643012



Light Oak Warm Brown
24775014
Matching skirting: 26643014



3. Soft Ash

For lovers of Scandinavian ambience. Delicate and clean with a soft touch for tranquil interiors. A perfect match for pastel colours and soft concrete.



Soft Ash White
24775018
Matching skirting: 26643018



Soft Ash Natural
24775019
Matching skirting: 26643019



4. Riviera Oak

The rustic appearance of this design is underlined by the play of colours from plank to plank. Perfect flooring for spaces with retro furniture and natural materials.



Riviera Oak Grey
24775015
Matching skirting: 26643015



Riviera Oak Light Brown
24775017
Matching skirting: 26643017




Riviera Oak Warm Brown
24775016
Matching skirting: 26643016



5. Timeless Concrete


Selected warm colours which will mix perfectly with wood and warm fabrics. A new cosy concrete in classic tile dimensions.

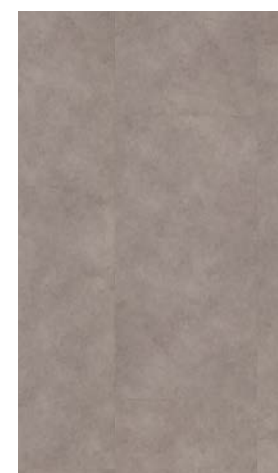

Timeless Concrete Grey
24776022
Matching skirting: 26643022



Timeless Concrete Anthracite
24776021
Matching skirting: 26643021

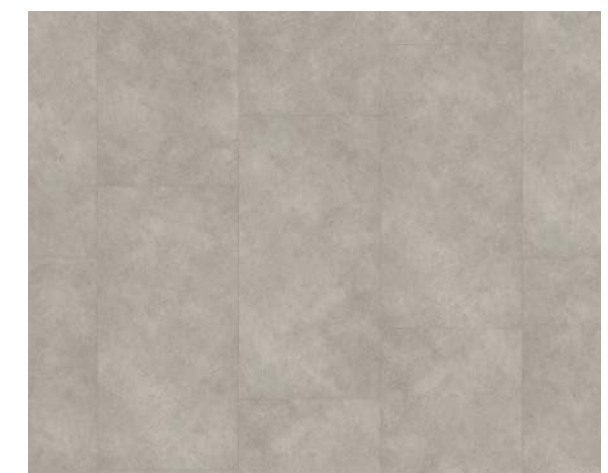

Timeless Concrete Light Grey
24776020
Matching skirting: 26643020

SPECIFICATION DATA

iD Click Ultimate

The selected flooring similar to iD Click Ultimate belongs to the compact vinyl floors category with a Rigid Composite Core layer manufactured through extrusion process.

It also contains an integrated acoustic backing of 19db.

It is available in planks (176x1213 mm) and tiles (300x600 mm) formats.

The wear layer of 0.70mm is reinforced with a PU treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations. It has a static indentation resistance $\leq 0,05\text{mm}$ and a dimensional stability according to ISO Norm EN 23 999 of 0,05% (versus $\leq 0,15\%$ required by the norm).

Its emission rate of total volatile organic compounds in air is less than $100 \mu\text{g} / \text{m}^3$ (TVOC after 28 days).


iD Click Ultimate comes with a 10 Years warranty.

ACCESSORIES FOR AN ULTIMATE FINISH

iD Click Ultimate comes with a full range of coordinated skirting and additional accessories. Please liaise with your local Tarkett representative for more information.

SKIRTING

PVC Decorative SKIRTING

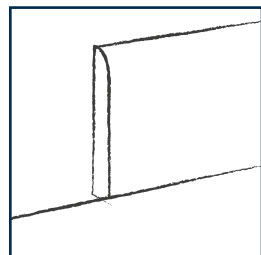


PVC Decorative Skirting
With PUR surface treatment.

- White (6 cm) - 26640700
- ▨ With decorative film matching collection designs (8 cm)

Packaging:
2,02lm skirtings
in packs of 10

PROFILE

Transition profile

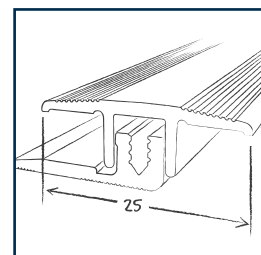

Aluminium profile,
to be screwed.

- Silver (1451 011)
- Stainless Steel (1451 012)

Packaging:
2.7lm profiles
in packs of 10

TECHNICAL DATA

Certification & classification	Standards	iD Click Ultimate		
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering		
Classification	EN ISO 10874	Domestic: 23 Commercial: 34 Industrial: 43		
Technical characteristics				
Total thickness	EN ISO 24346	6,5 mm		
Wear layer thickness	EN ISO 24340	0,7 mm		
Total weight	EN ISO 23997	11,3 kg/m ²		
Wear layer binder content	EN ISO 10582	Type I		
Dimensions	EN ISO 24342	Planks	176 x 1213 mm	6 planks/box = 1,28 m ²
		Tiles	300 x 600 mm	7 tiles/box = 1,26 m ²
Surface treatment (PUR)		Yes - PUR Ultimate		
Beveled edges		Yes - 4 Bevels		
Technical performances				
Dimensional stability	EN ISO 23999	Average measured value 0,05% Required value $\leq 0.15\%$		
Curl resultant to heat	EN ISO 23999	$\leq 1 \text{ mm}$		
Reaction to fire	EN 13501-1	B _f -s1		
Residual indentation	EN ISO 24343-1	$\leq 0,02 \text{ mm}$		
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 - EN 425	No damage		
Impact sound reduction	EN ISO 717-2	$\Delta L_w 19 \text{ dB}$		
Reduction of in-room impact noise	EN ISO 31-074	Class C ($L_{n,e,w} < 85 \text{ dB}$)		
Thermal resistance	EN ISO 10456	0,05 m ² K/W		
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6		
Chemical resistance	EN ISO 26987	Very Good		
Slip resistance	DIN 51130	R9		
	EN 13893	$\mu \geq 0,30$		
Electrical properties	EN 1815	$\leq 2 \text{ kV}$		
Peeling resistance	EN ISO 24345	$\geq 50\text{N} / 50\text{mm}$		
Underfloor heating		Suitable - max. 27 °C		

The above information is subject to modification for the benefit of further improvement. (01/18).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00



Produced under license from I4F
<https://i4f-patents.com>

Disclaimer: Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 ■ Belgium: Tarkett Belux Sprl - Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S - Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy - Tel. +358 9 4257 9000 ■ France: Tarkett SAS - Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt - Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. - Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland - Tel. +31 416 685 491 ■ Norway: Tarkett AS - Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA - Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. - Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen - Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics - Tel. +370 37 262 220 ■ Czech Republic: Tarkett org. složka - Tel. +420 271 001 600 ■ Hungary: Tarkett Polska SP Z.O.O. magyarországi fióktelepe - Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 16 09 231 ■ Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737 ■ Slovakia: Tarkett Polska, organizačná zložka - Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA - Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) - Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett - Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. +54 11 47 08 0772 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Latam Mexico - Tel. +55 11 98410 9310

03/2018 - 24775 3508 05

Due to evolution of standards, characteristics indicated in the text and images in this document are not binding only after confirmation by our departments.
Design: Gecko / Photo: Evolution / Print: Altavia

 **Tarkett**