





Never use chemicals with bleaching or abrasive properties.
Använd aldrig kemikalier med blekande eller slipande egenskaper.
Bruk aldri kjemikalier med blegning eller slipende egenskaper.
Brug aldrig kemikalier med blegemiddel eller slibende egenskaber.
Älä koskaan käyttää kemikaaleja valkaisevaa tai hankaavia ominaisuuksia.
Verwenden sie niemals chemikalien mit bleichmittel oder abrasiven eigenschaften.




FLIT




CE EN 14516:2006+A1:2010

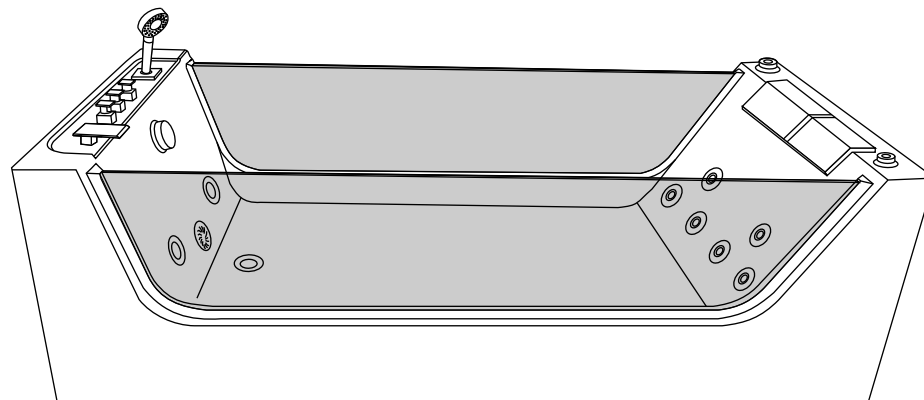






x1



x6



x1



VITAL



ECO



PLUS



A/B



C



D



+



AUTO ≈ 40°C

VITAL



ECO








PLUS



MAX
x50

E

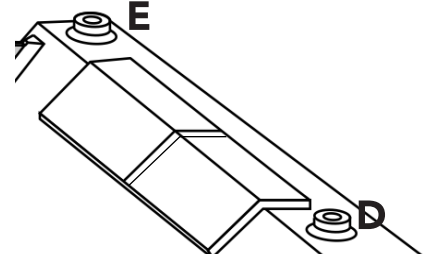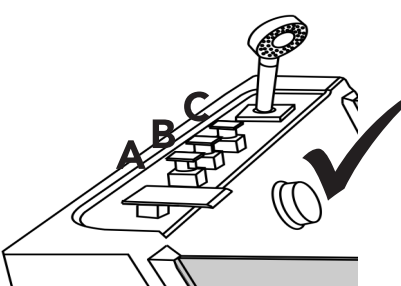

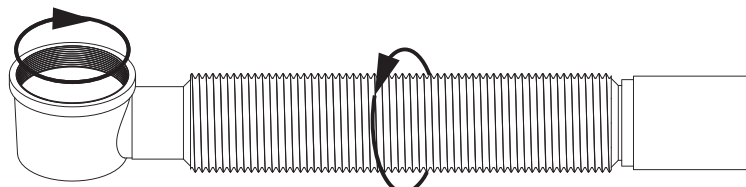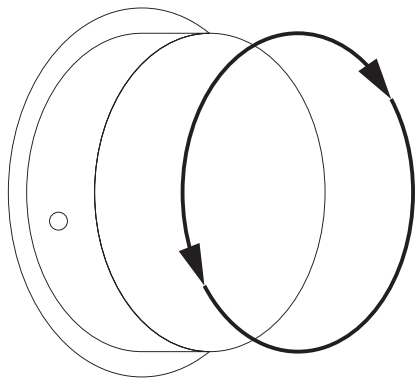


160 - 700 mm



VITAL ✗ ECO ✓ PLUS ✓

220V AC  



GFCI/RCD
MAX 30mA




750W

VITAL ✗ ECO ✓ PLUS ✓




1500W

VITAL ✗ ECO ✗ PLUS ✓









VITAL ✗ ECO ✓ PLUS ✓


$\geq 0,23 \text{ MPa}$ 



MAX 60°C

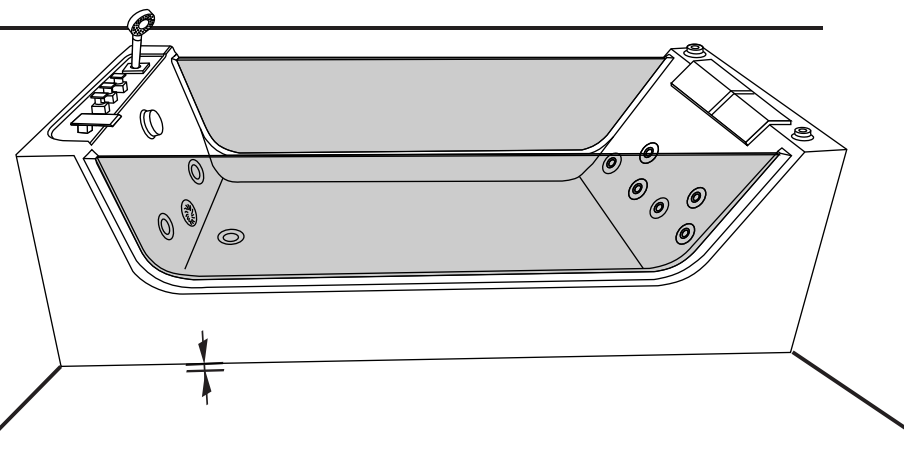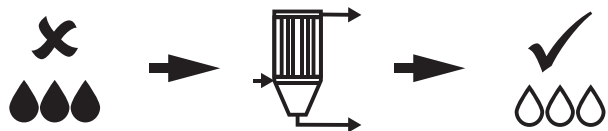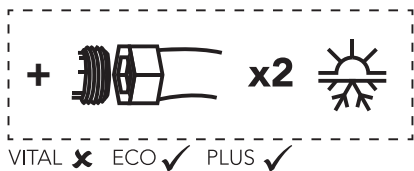

MIN 10 mm

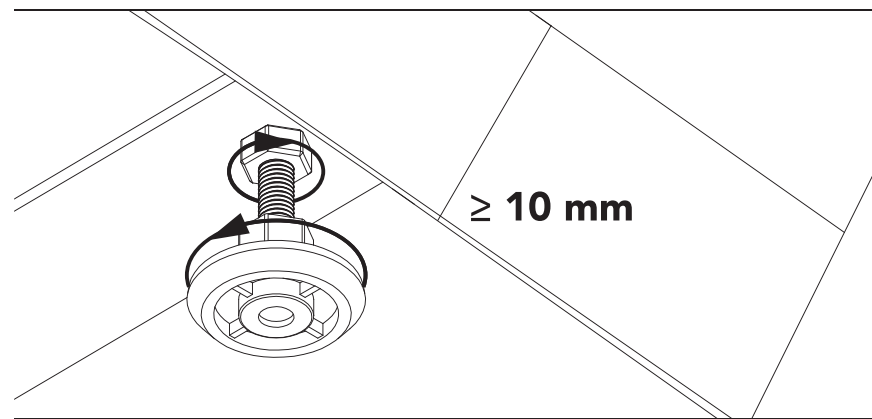

$\geq 10 \text{ mm}$