
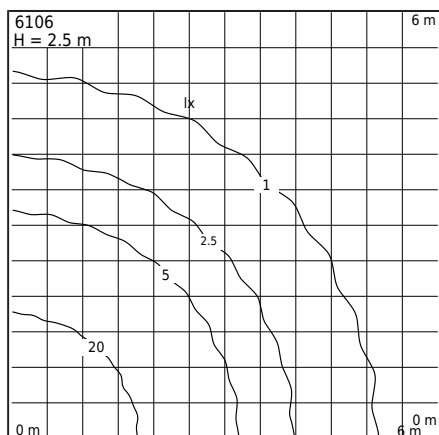
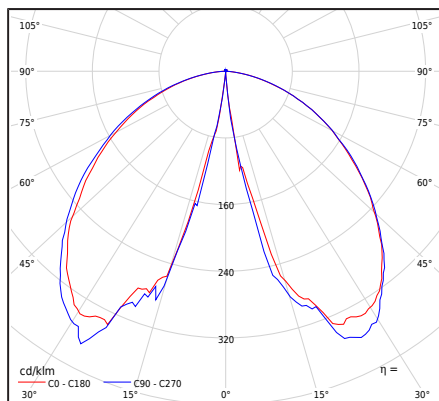


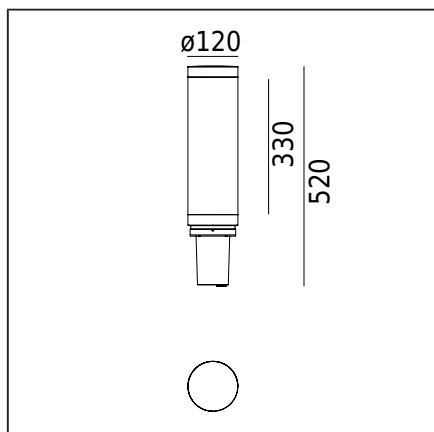

Art	E-nr	Färg	RAL
6106AL	7748688	ALUMINIUM	9006
6106GR	7748689	GRAFIT	7016

Allmän information

Typ armatur	Stolpe
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	PMMA, klart
Typ ljuskälla	LED modul + driver
Ljusstyrning	Dimbar (Triac)
Netto / Bruttovikt armatur	1,96kg / 2,6kg
Förpackning mått [cm]	14,5x14,5x70
LED	Cree DK210704 V2 JB2835 3V 3K (Ø Produktblad)
Drivdon	TCI MICRO MD 10W 350mA 127040 Triac (Ø Produktblad)
Led modul effekt	7,4W
Armatur effekt	9,1W
Lumen modul	1370lm
Lumen ut	907lm
Led modul effekt	185,1lm/W
Armaturens effekt	99,7lm/W
ULOR	1%
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
LED-fotobiologiskt hot	RG0 or RG1
Energieffektivitetsindex (EEI)	A / EPREL
Effektfaktor	PF 0,90
Ta nominel:	+25°C
Maximal omgivningstemperatur	+40°C
Inrush current	2A / 50µs

Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer